



MF(Multi-fastener) Flange conforming to ISO1609 is used for error absorption and workability improvement by connecting with claw clamp. Also, by using single claw clamp, you can connect piping flange directly to vacuum chamber, and that could lead to reduction of BOM and space. Design and production of special shape in accordance with use environment are also available other than the catalog products.

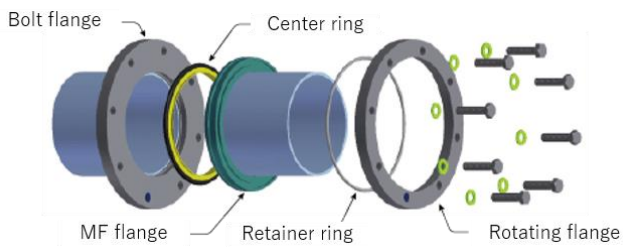

Rotatable flange (Collar flange)

Material: SUS304
Retainer ring is included.

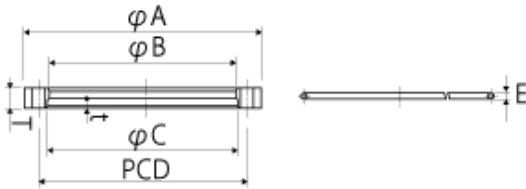

Code	Flange size	ϕA	ϕB	ϕC	PCD	T	t	N	ϕh	E
MCM-3063	NW63	130	95.5	98.5	110	12	5.5	4	9	3
MCM-3080	NW80	145	110.5	113.5	125	12	5.5	8	9	3
MCM-3100	NW100	165	130.5	133.5	145	12	5.5	8	9	3
MCM-3125	NW125	200	155.7	160.7	175	16	6.5	8	11	5
MCM-3160	NW160	225	180.7	185.7	200	16	6.5	8	11	5
MCM-3200	NW200	285	240.7	245.7	260	16	6.5	12	11	5
MCM-3250	NW250	335	290.7	295.7	310	16	6.5	12	11	5