

메쉬부착 센터링


재질

SUS304, SUS316L

메쉬부: #8, JIS G 3555

O-링: 바이톤

최고 사용온도: 150°C

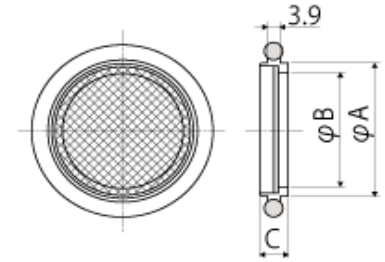

<단위: mm>

코드		사이즈	φA	φB	C
SUS304	SUS316L				
MCK-2010-MS	MCK-2010-MS-40	KF10	12.0	7	8
MCK-2016-MS	MCK-2016-MS-40	KF16	17.0	13	8
MCK-2025-MS	MCK-2025-MS-40	KF25	26.0	20	8
MCK-2040-MS	MCK-2040-MS-40	KF40	41	35	8
MCK-2050-MS	MCK-2050-MS-40	KF50	52	44	8
MCK-2080-MS	MCK-2080-MS-40	KF80	82.8	74	8
MCK-2100-MS	MCK-2100-MS-40	KF100	101.6	93	8
MCK-2160-MS	MCK-2160-MS-40	KF160	152.8	141	12
MCK-2200-MS	MCK-2200-MS-40	KF200	212.8	198	12

메쉬 사이즈표

메쉬 사이즈	선직경(mm)	메쉬간격(mm)
#8	0.57	2.61
#10	0.5	2.04
#20	0.25	1.02
#40	0.25	0.39
#50	0.18	0.33
#80	0.12	0.20
#100	0.1	0.154
#150	0.06	0.109